


# Screw Shank Specifications

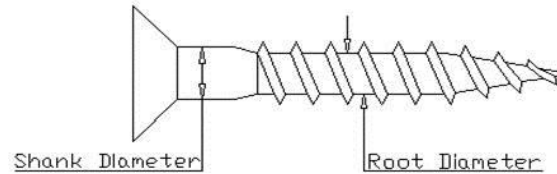

Gauge	Maximum Head Diameter		Shank Diameter			Root Diameter			Threads Per Inch	Driver Tip		Pilot Hole		
			Basic Decimal Size (Inches)	Nearest Fractional Equivalent	Basic Decimal Size (mm)	Average Decimal Size (Inches)	Nearest Fractional Equivalent	Average Decimal Size (mm)		Slotted Tip	Phillips Size	Hardwood	Softwood	Metal
	Inches	mm												
0	0.119	3.023	0.060	1/16	1.524	0.040	3/64	1.016	32	3/32	0	1/32	1/32	3/64
1	0.146	3.708	0.073	5/64	1.854	0.046	3/64	1.168	28	3/16	0	3/64	1/32	3/64
2	0.172	4.369	0.086	3/32	2.184	0.054	1/16	1.372	26	3/16	1	1/16	1/16	1/16
3	0.199	5.055	0.099	7/64	2.515	0.065	1/16	1.651	24	3/16	1	5/64	1/16	1/16
4	0.225	5.715	0.112	7/64	2.845	0.075	5/64	1.905	22	3/16	1	5/64	1/16	5/64
5	0.252	6.401	0.125	1/8	3.175	0.085	5/64	2.159	20	3/16	2	3/32	5/64	5/64
6	0.279	7.087	0.138	9/64	3.505	0.094	3/32	2.388	18	3/16	2	7/64	3/32	3/32
7	0.305	7.747	0.151	5/32	3.835	0.102	7/64	2.591	16	3/16	2	7/64	3/32	7/64
8	0.332	8.433	0.164	5/32	4.166	0.112	7/64	2.845	15	1/4	2	7/64	7/64	7/64
9	0.358	9.093	0.177	11/64	4.496	0.122	1/8	3.099	14	1/4	2	7/64	7/64	1/8
10	0.385	9.779	0.190	3/16	4.826	0.130	1/8	3.302	13	5/16	2 or 3	1/8	7/64	9/64
11	0.411	10.439	0.203	13/64	5.156	0.139	9/64	3.531	12	3/8	3	1/8	1/8	5/32
12	0.438	11.125	0.216	7/32	5.486	0.148	9/64	3.759	11	3/8	3	1/8	1/8	11/64
14	0.491	12.471	0.242	1/4	6.147	0.165	5/32	4.191	10	3/8	3	5/32	1/8	13/64
16	0.544	13.818	0.268	17/64	6.807	0.184	3/16	4.674	9	3/8	3	5/32	5/32	7/32
18	0.597	15.164	0.294	19/64	7.468	0.204	13/64	5.182	8	3/8	4	3/16	5/32	15/64
20	0.650	16.510	0.320	5/16	8.128	0.223	7/32	5.664	8	3/8	4	7/32	3/16	1/4
24	0.756	19.202	0.372	3/8	9.449	0.260	1/4	6.604	7	3/8	4	1/4	1/4	9/32

[www.acpools.com.au](http://www.acpools.com.au)